

Company :	Date :	2018/06/11.
To :	From :	agrava
Subject :	Page :	1 / 4
Reference :		



Model :	GLOBAL PX 3000 FW R
---------	----------------------------

The GLOBAL PX FW series is a range of mechanical home ventilation units (up to 6.000 m³/h or 1.666 l/s) with high efficiency (>90% acc. EN308) heat recovery, consisting of aluminium counterflow heat exchangers, a stainless steel drain pan, M5 and F7 class filters and of TAC technology centrifugal fans with high efficiency electronic motors. It will be delivered ready to use, entirely pre-cabled (the options as well) and with a remote control which will allow to control the unit without opening it. All that'll need to be done is to connect the power (outside the unit), to connect the remote control and to set the parameters and that's it ! The device will be delivered as standard with a modulating by-pass (100%), and its pre-cabled control. The new control is designed to receive and monitor the different options available according to your needs.

The structure of the unit is in extruded anodized aluminium profile, articulated around strengthened polypropylene modules. Panels are 50 mm double skin. The outside is made of polyester pre-painted steel, and the inside is made of galvanized steel. The heat and sound insulation is made of mineral wool. The GLOBAL PX FW series is mounted on base frame, and is made in one piece (mono block). The doors are equipped with handles and hinges. Airtightness of the group allows to classify the device in class 1 for the internal leaks and class 2 for the external leaks according to standard EN 13141-7.

EN1886 Classification :

Mechanical resistance class of the envelope: D1
Thermal transmittance class U : T3
Thermal bridge class Kb : TB3
Airtightness of the envelope class (exhaust and supply airstreams) : L2
Airtightness around the filters class (exhaust and supply airstreams) : F9

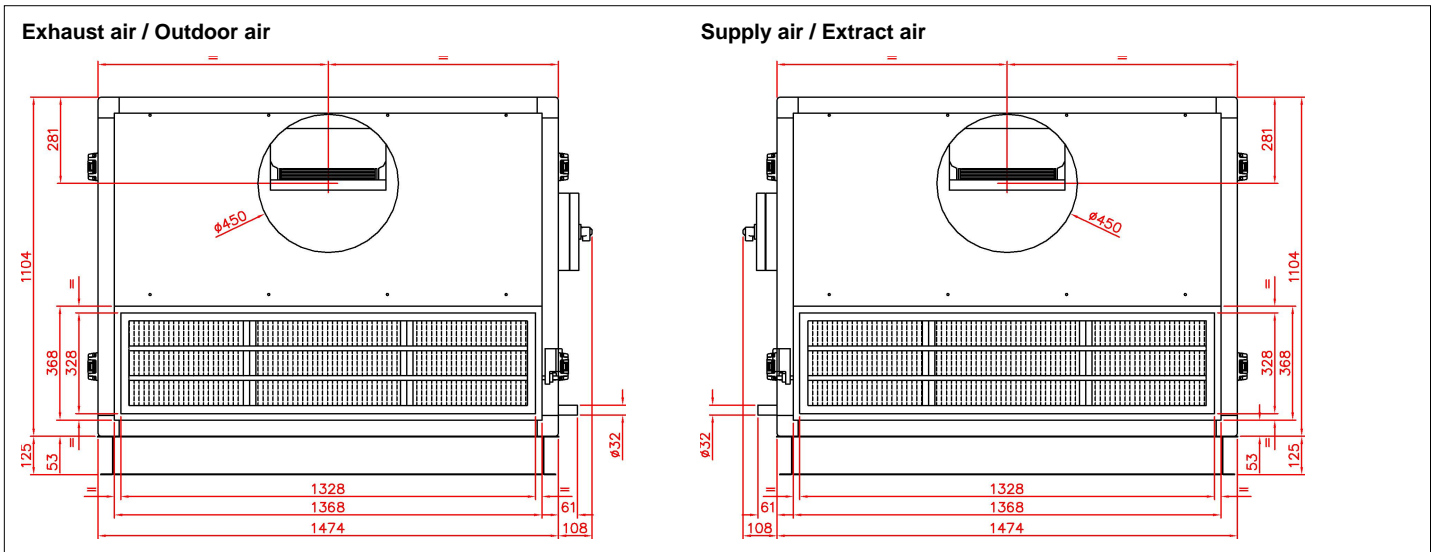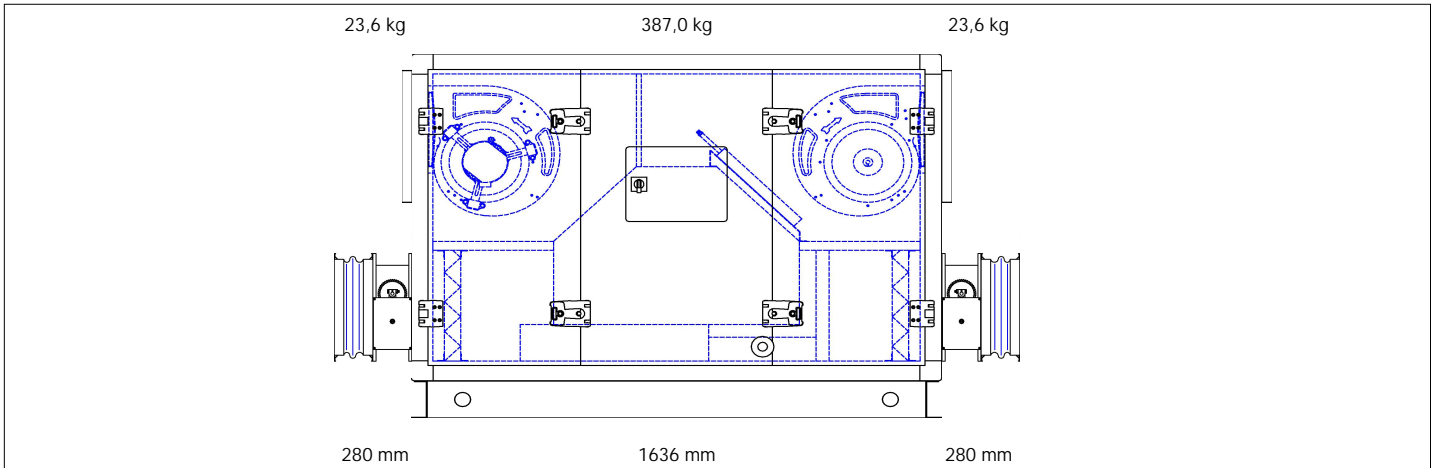

Company :	Date :	2018/06/11.
To :	From :	agrava
Subject :		
Reference :	Page :	2 / 4

Model :	GLOBAL PX 3000 FW R
---------	----------------------------

Supply : Fans + Controls	
Voltage :	1 x 230 V - 50 Hz
Intensity :	17,8 A max.
Electrical protection :	D20A - 10kA - AC3

Fans - TAC																																																			
Units are equipped with high efficiency TAC (Total Airflow Control) technology fans. They are driven by electronically commutated motors and allow accurate control of the fan's actual working point. The efficiency of the motor remains between 85% and 60%, whatever the working point. The motor is a permanent magnet DC driven motor but AC power supplied.																																																			
	<table border="0"> <tr> <td style="text-align: right;"><u>Supply</u></td> <td style="text-align: right;"><u>Exhaust</u></td> <td></td> <td>Fan name :</td> <td>DD 11-11 TAC 1/1</td> </tr> <tr> <td>Airflow :</td> <td>3000</td> <td>3000 m³/h</td> <td>Number of fans :</td> <td>1 + 1</td> </tr> <tr> <td>Internal pressure drop :</td> <td>310</td> <td>275 Pa</td> <td>Sound power spectrum (fan only)-(dB re.10E-12 W/m²)</td> <td></td> </tr> <tr> <td>External pressure drop :</td> <td>200</td> <td>200 Pa</td> <td></td> <td></td> </tr> <tr> <td>Extra available pressure drop :</td> <td>31</td> <td>66 Pa</td> <td></td> <td></td> </tr> <tr> <td>Rotation speed :</td> <td>1392</td> <td>1345 rpm</td> <td></td> <td></td> </tr> <tr> <td>Voltage :</td> <td>230</td> <td>230 V</td> <td></td> <td></td> </tr> <tr> <td>Intensity :</td> <td>6,20</td> <td>5,80 A</td> <td></td> <td></td> </tr> <tr> <td>Power :</td> <td>1088</td> <td>1010 W</td> <td></td> <td></td> </tr> <tr> <td>Specific fan power, SFPv (clean filters) :</td> <td>2,52</td> <td>kW/(m³/s)</td> <td></td> <td></td> </tr> </table>	<u>Supply</u>	<u>Exhaust</u>		Fan name :	DD 11-11 TAC 1/1	Airflow :	3000	3000 m ³ /h	Number of fans :	1 + 1	Internal pressure drop :	310	275 Pa	Sound power spectrum (fan only)-(dB re.10E-12 W/m ²)		External pressure drop :	200	200 Pa			Extra available pressure drop :	31	66 Pa			Rotation speed :	1392	1345 rpm			Voltage :	230	230 V			Intensity :	6,20	5,80 A			Power :	1088	1010 W			Specific fan power, SFPv (clean filters) :	2,52	kW/(m ³ /s)		
<u>Supply</u>	<u>Exhaust</u>		Fan name :	DD 11-11 TAC 1/1																																															
Airflow :	3000	3000 m ³ /h	Number of fans :	1 + 1																																															
Internal pressure drop :	310	275 Pa	Sound power spectrum (fan only)-(dB re.10E-12 W/m ²)																																																
External pressure drop :	200	200 Pa																																																	
Extra available pressure drop :	31	66 Pa																																																	
Rotation speed :	1392	1345 rpm																																																	
Voltage :	230	230 V																																																	
Intensity :	6,20	5,80 A																																																	
Power :	1088	1010 W																																																	
Specific fan power, SFPv (clean filters) :	2,52	kW/(m ³ /s)																																																	
				<table border="1"> <thead> <tr> <th></th> <th>63</th> <th>125</th> <th>250</th> <th>500</th> <th>1000</th> <th>2000</th> <th>4000</th> <th>8000</th> <th>Hz</th> </tr> </thead> <tbody> <tr> <td>S</td> <td>91,7</td> <td>86,7</td> <td>81,7</td> <td>74,7</td> <td>76,7</td> <td>69,7</td> <td>64,7</td> <td>59,7</td> <td>dBL</td> </tr> <tr> <td>E</td> <td>91,1</td> <td>86,1</td> <td>81,1</td> <td>74,1</td> <td>76,1</td> <td>69,1</td> <td>64,1</td> <td>59,1</td> <td>dBL</td> </tr> </tbody> </table>		63	125	250	500	1000	2000	4000	8000	Hz	S	91,7	86,7	81,7	74,7	76,7	69,7	64,7	59,7	dBL	E	91,1	86,1	81,1	74,1	76,1	69,1	64,1	59,1	dBL																	
	63	125	250	500	1000	2000	4000	8000	Hz																																										
S	91,7	86,7	81,7	74,7	76,7	69,7	64,7	59,7	dBL																																										
E	91,1	86,1	81,1	74,1	76,1	69,1	64,1	59,1	dBL																																										
									Radiated A weighted Sound pressure level for ducted unit in free field (d=3m) 39,6 dBA <small>(RF=600000000/DF=1/ZF=20,40)-(dB re. 20 µPa)</small>																																										

Controls	
The units GLOBAL PX FW are delivered fully pre-wired as standard ('plug & play') with main switch and complete control of the unit. The latter includes all the necessary components and is fully wired to T° probes, fans, main switch, modulating by-pass, as well as all options such as pre and post heating, dampers. Connect the power supply and configure the parameters and the unit is ready to run.	
The controller monitors each component:	
<ul style="list-style-type: none"> •Setting and piloting of TAC (Total Airflow Control) fans in selected mode: CA (constant flow), CP (constant pressure measured by an optional external sensor), LS (link with signal 0 - 10V, for example a CO2 air quality sensor) or TQ (constant torque) •Automatic freecooling control via the modulating bypass •Antifrost system of the air/air heat exchanger (airflow modulation, electrical coil or via modulating bypass) •Control of internal post-heating coil (water or electrical) •Control of external post-heating coil (water or electrical) or cooling coil (water), or reversible coil (heating or cooling water coil) •Open/Close motorized dampers •Time slot management (scheduling) •Alarms management (fire, pressure, maintenance, component failure,...) •Display and management of all system parameters via TACtouch, BMS or web page (option) •MODBUS communication (RTU, TCP/IP and GPRS) or KNX (option) 	

Heat Recovery unit - CF																																									
The heat exchanger is an air/air high efficiency counterflow heat exchanger, executed in sea water resistant aluminium, at a temperature of up to 80°C. The airtightness tests according to DIN1946 show a leakage rate of 0.017 % at 400 Pa difference between the 2 air streams. The heat exchanger is compliant to standard EN 308. The technical selection as presented below is realised with the Eurovent certified selection software from our supplier of the rotary heat exchanger.																																									
Eurovent Certification Diploma N° : 05.03.243 & 11.07.006																																									
Updates of this document are available via: http://www.eurovent-certification.com .																																									
Air pressure :	1013 mbar																																								
	<table border="0"> <tr> <td style="text-align: right;"><u>Supply</u></td> <td style="text-align: right;"><u>Exhaust</u></td> <td></td> <td style="text-align: right;"><u>Supply</u></td> <td style="text-align: right;"><u>Exhaust</u></td> </tr> <tr> <td>Airflow :</td> <td>3000</td> <td>3000 m³/h</td> <td>Air outlet temperature :</td> <td>18,7</td> </tr> <tr> <td></td> <td>0,83</td> <td>0,83 m³/s</td> <td>Relative humidity out :</td> <td>3,9</td> </tr> <tr> <td>Airspeed through HRU :</td> <td>1,87</td> <td>2,20 m/s</td> <td>Humidity out :</td> <td>0,5</td> </tr> <tr> <td>Air inlet temperature :</td> <td>-21,0</td> <td>22,0 °C</td> <td>Capacity (W.B.) :</td> <td>40,0</td> </tr> <tr> <td>Relative humidity in :</td> <td>90,0</td> <td>40,0 %</td> <td>Efficiency HRU (W.B.) :</td> <td>92,4</td> </tr> <tr> <td>Humidity in :</td> <td>0,5</td> <td>6,6 g/kg</td> <td>Capacity (D.B.) :</td> <td>36,3</td> </tr> <tr> <td>Pressure drop in HRU :</td> <td>171</td> <td>235 Pa</td> <td>Efficiency HRU (D.B.) :</td> <td>83,8</td> </tr> </table>	<u>Supply</u>	<u>Exhaust</u>		<u>Supply</u>	<u>Exhaust</u>	Airflow :	3000	3000 m ³ /h	Air outlet temperature :	18,7		0,83	0,83 m ³ /s	Relative humidity out :	3,9	Airspeed through HRU :	1,87	2,20 m/s	Humidity out :	0,5	Air inlet temperature :	-21,0	22,0 °C	Capacity (W.B.) :	40,0	Relative humidity in :	90,0	40,0 %	Efficiency HRU (W.B.) :	92,4	Humidity in :	0,5	6,6 g/kg	Capacity (D.B.) :	36,3	Pressure drop in HRU :	171	235 Pa	Efficiency HRU (D.B.) :	83,8
<u>Supply</u>	<u>Exhaust</u>		<u>Supply</u>	<u>Exhaust</u>																																					
Airflow :	3000	3000 m ³ /h	Air outlet temperature :	18,7																																					
	0,83	0,83 m ³ /s	Relative humidity out :	3,9																																					
Airspeed through HRU :	1,87	2,20 m/s	Humidity out :	0,5																																					
Air inlet temperature :	-21,0	22,0 °C	Capacity (W.B.) :	40,0																																					
Relative humidity in :	90,0	40,0 %	Efficiency HRU (W.B.) :	92,4																																					
Humidity in :	0,5	6,6 g/kg	Capacity (D.B.) :	36,3																																					
Pressure drop in HRU :	171	235 Pa	Efficiency HRU (D.B.) :	83,8																																					

Company :	Date :	2018/06/11.
To :	From :	agrava
Subject :		
Reference :	Page :	3 / 4

Model :	GLOBAL PX 3000 FW R
---------	----------------------------

Internal post-heating (Warm water) - NVr

A post-heating water coil is placed inside the unit and makes it possible to control either the supply air temperature in the room, or to manage a comfort temperature of the room by controlling the temperature at the inlet of exhaust air. This coil is delivered ready to be connected to the heating network, with a complete set of controls including a motorized 3 way valve. The 3-way valve has been selected so that 50% of the available pressure drop is above the valve (authority of 0,5). Just key in the desired temperature and the controls will modulate the coil capacity to reach this set value, according to the supply or exhaust temperature (depending on the option chosen). The outside panel of the AHU equipped with plug fans (Backwards) is factory drilled to facilitate the passage of hydraulic connections.

Coil name :	HRg 3000-1	Air inlet T° :	13,7 °C	Connection diam. :	1/2"
Number of rows :	1	Outlet air T° :	20,1 °C	Fluid type :	Water
Number of circuits :	2	Airflow :	3000 m ³ /h	Glycol %age :	0 %
Total capacity :	6,58 kW	Air speed :	2,16 m/s	Fluid T° in/out :	80,0 / 60,0 °C
		Air pressure drop :	15 Pa	Fluid flow :	289 l/h
				Fluid pressure drop :	1,77 kPa

Filter - G/F

The heat recovery ventilation unit is equipped with M5 class plane filters at the inlet of the polluted air and F7 class plane filters at inlet of the fresh air, to correctly protect the heat exchanger and guarantee optimum air quality inside the building. Filters are easily accessible through the access doors for maintenance purposes. F7 plane filters on both sides (supply & exhaust) are available as an additional option.

				<u>Supply</u>	<u>Exhaust</u>	
Filter class :	F7	Dimensions :	436(2x)/503(1x)x370x50 mm	Air speed :	1,72	m/s
		Quantity :	3	Filter pressure drop :	117	Pa
Filter class :	M5	Dimensions :	436(2x)/503(1x)x370x50 mm	Air speed :	1,72	m/s
		Quantity :	3	Filter pressure drop :	33	Pa

Damper(s) - CTm

The dampers are motorized and pre-wired, to cut the draft during the powering off of the device. It comes with a pre-wired servo motor and is controlled by the controller of the air handling unit. The frame is in galvanised steel, the blades in aluminum and the bearings and bushes are in nylon. The external gears, in plastic material, allow a transmission without looseness or deformation. The blades are fitted with a rubber sealing.

Air tightness circular dampers according EN 1751: Class 3
 Air tightness rectangular dampers according EN 1751: Class 2

			<u>Supply</u>	<u>Exhaust</u>	
External dimensions :	365 x 1365 mm	Air speed :	2,28	2,28	m/s
Internal dimensions :	285 x 1285 mm	Damper pressure drop :	7	7	Pa


Circular outlet - SR ø 450 mm

Base frame - BA

Flexible connection + Slip Clamp (air in) - MS

Company :	Date :	2018/06/11.
To :	From :	agrava
Subject :	Page :	4 / 4
Reference :		

Model :	GLOBAL PX 3000 FW R
---------	----------------------------

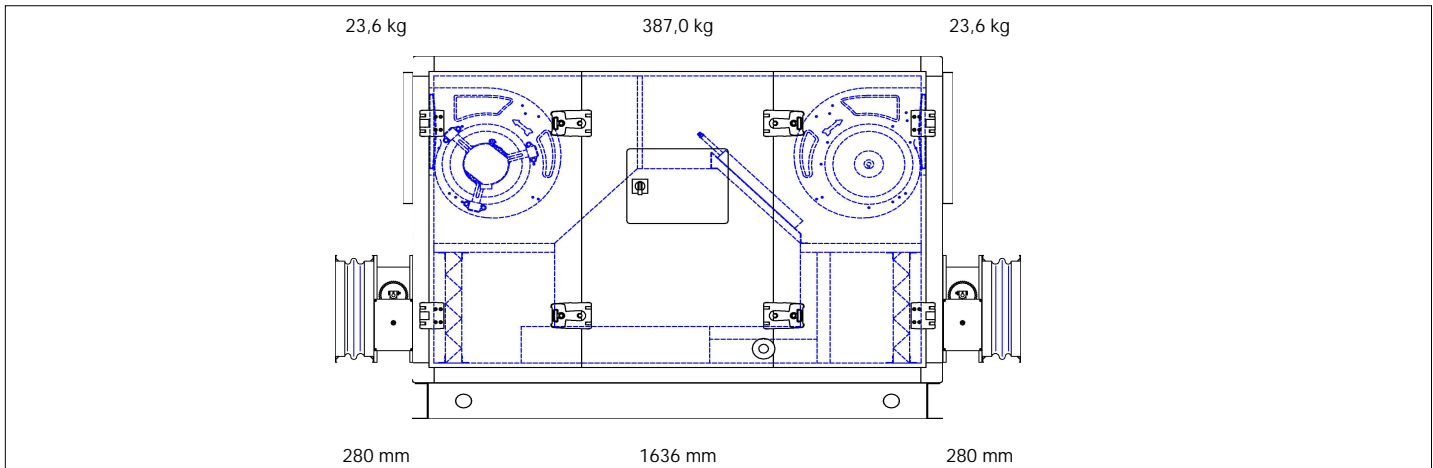

Manufacturing info		
885310	882039	882039
882034	880564	880564
882646	882646	



Detail	
IDCode	Description
885310	GLOBAL PX 3000 FW R
882034	GLOBAL PX 3000 NV
882646	GLOBAL PX 3000 SR (in+out)
882039	GLOBAL PX 3000 CT
880564	GLOBAL PX 3000 MSA
882646	GLOBAL PX 3000 SR (in+out)
882039	GLOBAL PX 3000 CT
880564	GLOBAL PX 3000 MSA

Accessories (included)		
IDCode	Quantity	Description
372096	1	HMI TACtouch touchscreen user interface
370005	1	SAT3 Relay satellite (fan ON or CT+ AL dPA)

Options (not included)		
IDCode	Quantity	Description
510092	1	GF Filter kit GLOBAL PX 3000 (M5/F7)
372004	1	KIT SAT TAC5 BA/KW Regulation satellite for external coil (0-10V)
025006	1	SAT TAC5 MODBUS Communication satellite Modbus RTU
370015	1	SENS Wallmounting air quality sensor
370016	1	SENS Duct air quality sensor

SERVOLUX SIA Gan bu dambis 30/1-303 Gan bu dambis 30/1-303 Tel.+371.29167325 Fax.+46(0)31/899469 info@servolux.lv